

**ISA** SPECIALITY

Cal. 9238 / 1970



ISASWISS CONCEPT

10 1/2 '''

23.30 mm

H. 4.13



In conformity with RoHS standard

### MultiFunction

9h

MON

Day by Hand

6h



Dual Time

3h

28

Date by Hand

**ISASWISS**  
WATCH MECHANISMS

### Characteristics :

Electronic quartz movement. Rotating stepping motor, 1 step per second.  
 6 hands, central second.  
 3 eyes: day, date, second time zone (or 24 hours).  
 Day adjusted by the pusher at 10H (option)  
 Quick date correction.  
 Stem 3 positions.  
 Mechanical and electrical stop device.



### 特性：

石英機芯, 步進馬達, 每秒跳一步距。  
 6 針, 中心秒針。  
 3 眼指示: 星期, 日曆, 第二時區(或24小時)。  
 10 時位按鈕快調星期 (選擇)  
 快調日曆校正。  
 3 字把芯。  
 機械與電子停止裝置。


Criteria 標準	Conditions 條件	Min. 最小	Typ. 典型	Max. 最大	Units 單位
Current consumption 耗電量	U=1,55V T=25°C		1.85		µA
Instantaneous rate 準確度	U=1,55V T=25°C	-0.5 (-15)		+0.5 (+15)	s/day / 秒/日 (s/month / 秒/月)
Operating temperature 操作溫度		0		+50	°C
Resistance to magnetic fields 抗磁性			1500 (18.8)		A/m (Oe)

Qty 數量	Designation 名稱	Model 型號	Voltage 電壓	Code 編碼	Capacity 容量	Theoretical Autonomy 電池壽命
1	Battery 9.50 x 2.10 電池	SR 920 SW	1,55 V	371	42 mAh	Approx. 32 months 約32個月

## FRAME 框架

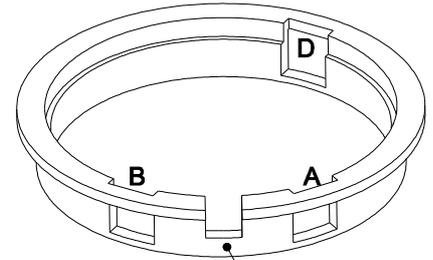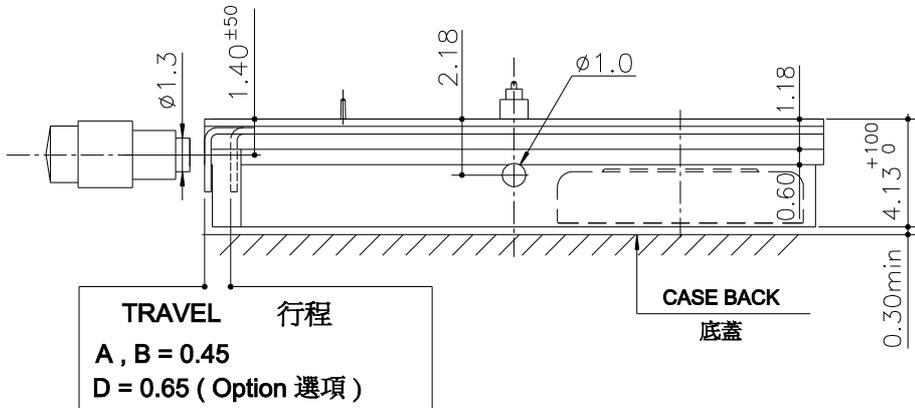

Casing ring needs to have clearance on pusher position A, B and D.  
內罩需要做避空 A, B, D 按制位

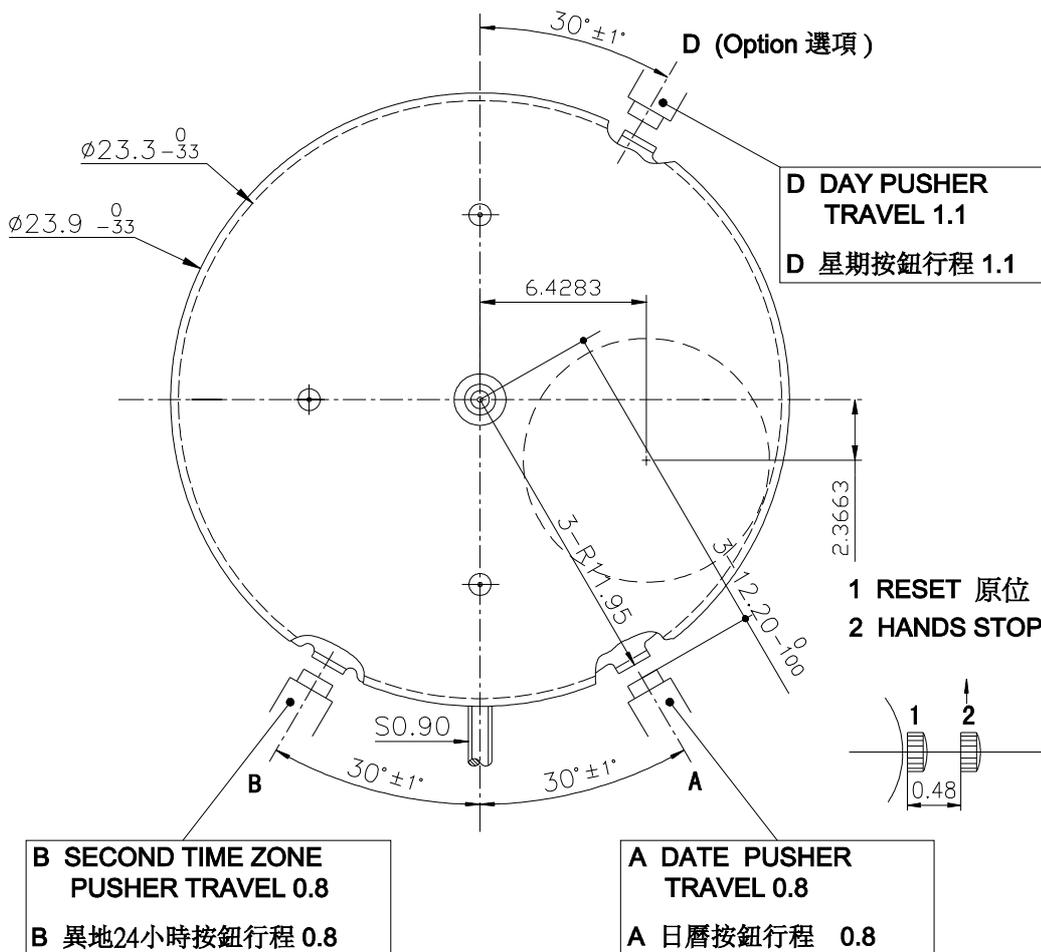


DIMENSIONS IN mm. - TOLERANCES IN μm.

In conformity with RoHS standard

Doc. n° SCTS9238/1970 - E Up date . 22/08/2011 - Page 3

## DIAL 表盤

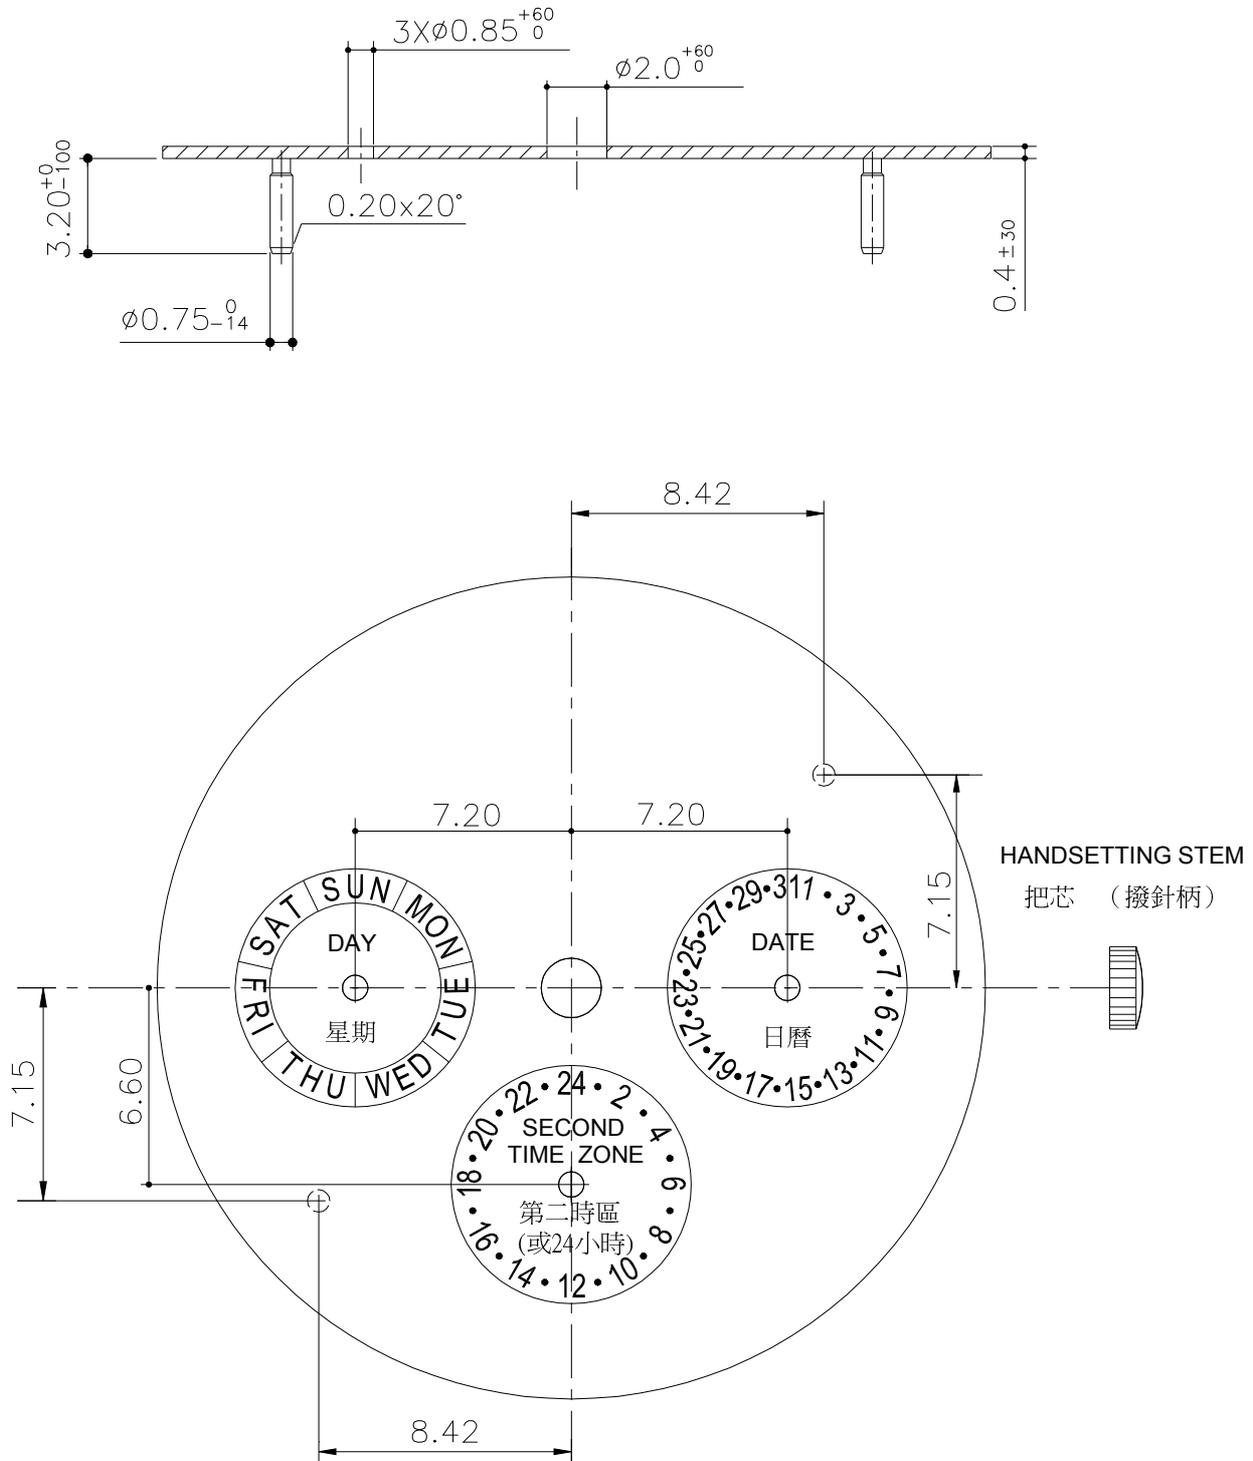


DIMENSIONS IN mm. - TOLERANCES IN  $\mu$ m.

In conformity with RoHS standard

Doc. n° SCTS9238/1970 - E Up date . 22/08/2011 - Page 4

## HAND-FITTING 針高

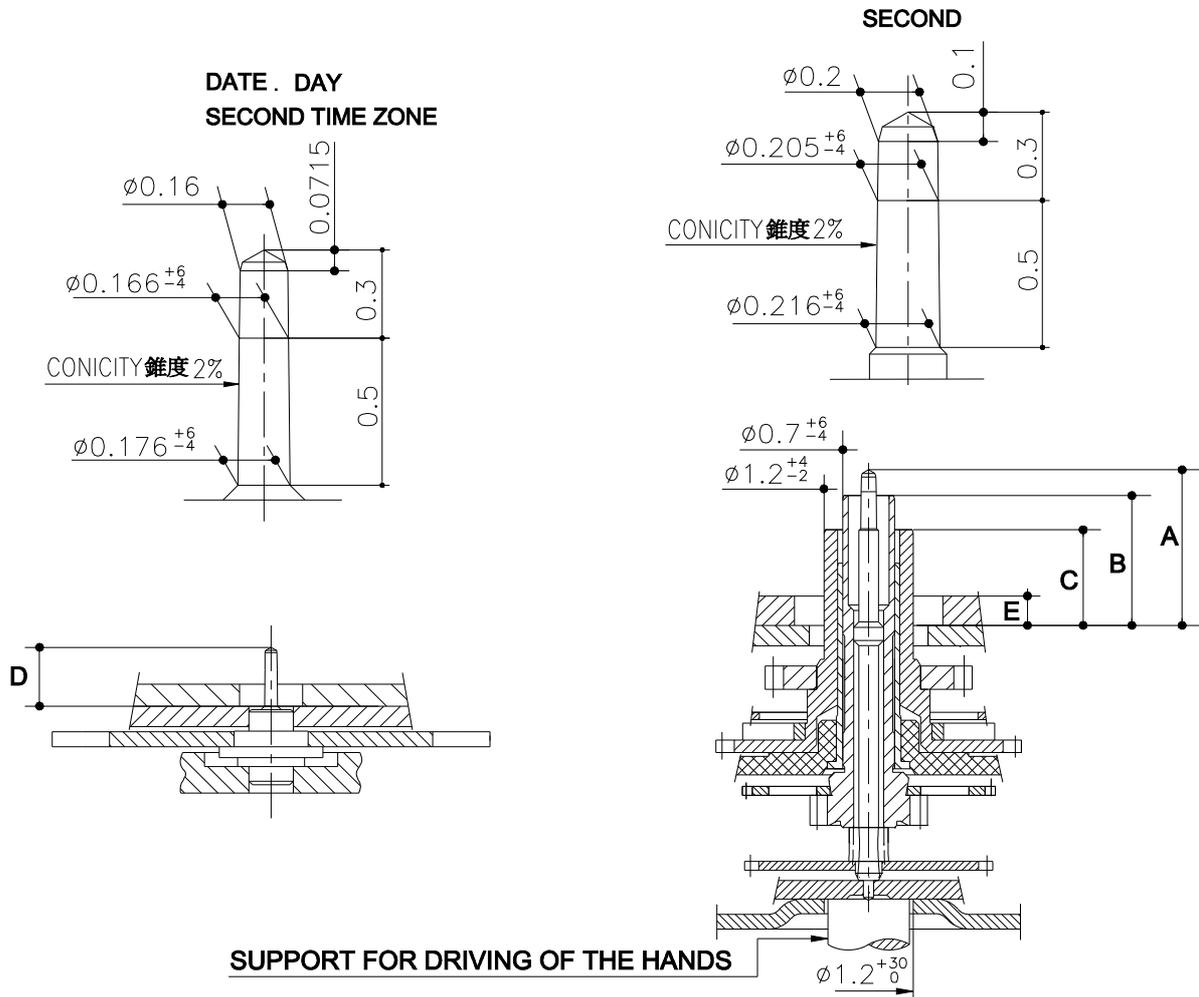

HAND-FITTING 針高	Height over dial seat				Dial Thickness 表面厚度
	A	B	C	D	E
	SECOND 秒	MINUTE 分	HOUR 時	DATE DAY SECOND TIME ZONE 小針	
N°2	2.10	1.75	1.30	0.80	0.40
N°3	2.35	2.00	1.55	1.05	0.70

550 g SHOCKS 550克 冲击力	Mass 重量	Unbalance 不平衡	Inertia 慣性	PRESS-IN-FORCE 裝針力度
Hour Hand - 時針	≤ 2750 mg	N/A	≤ 88 gmm <sup>2</sup>	≤ 25 N
Minute Hand - 分針	≤ 250 mg	≤ 0.8 μNm	≤ 8 gmm <sup>2</sup>	≤ 25 N
Second Hand - 秒針	≤ 5 mg	≤ 0.2 μNm	≤ 0.16 gmm <sup>2</sup>	≤ 25 N
Small Counters Hands - 小針	≤ 5 mg	≤ 0.2 μNm	≤ 0.16 gmm <sup>2</sup>	≤ 20 N


DIMENSIONS IN mm. - TOLERANCES IN μm.

In conformity with RoHS standard

Doc. n° SCTS9238/1970 - E Up date . 22/08/2011 - Page 5

Design example

设计范例

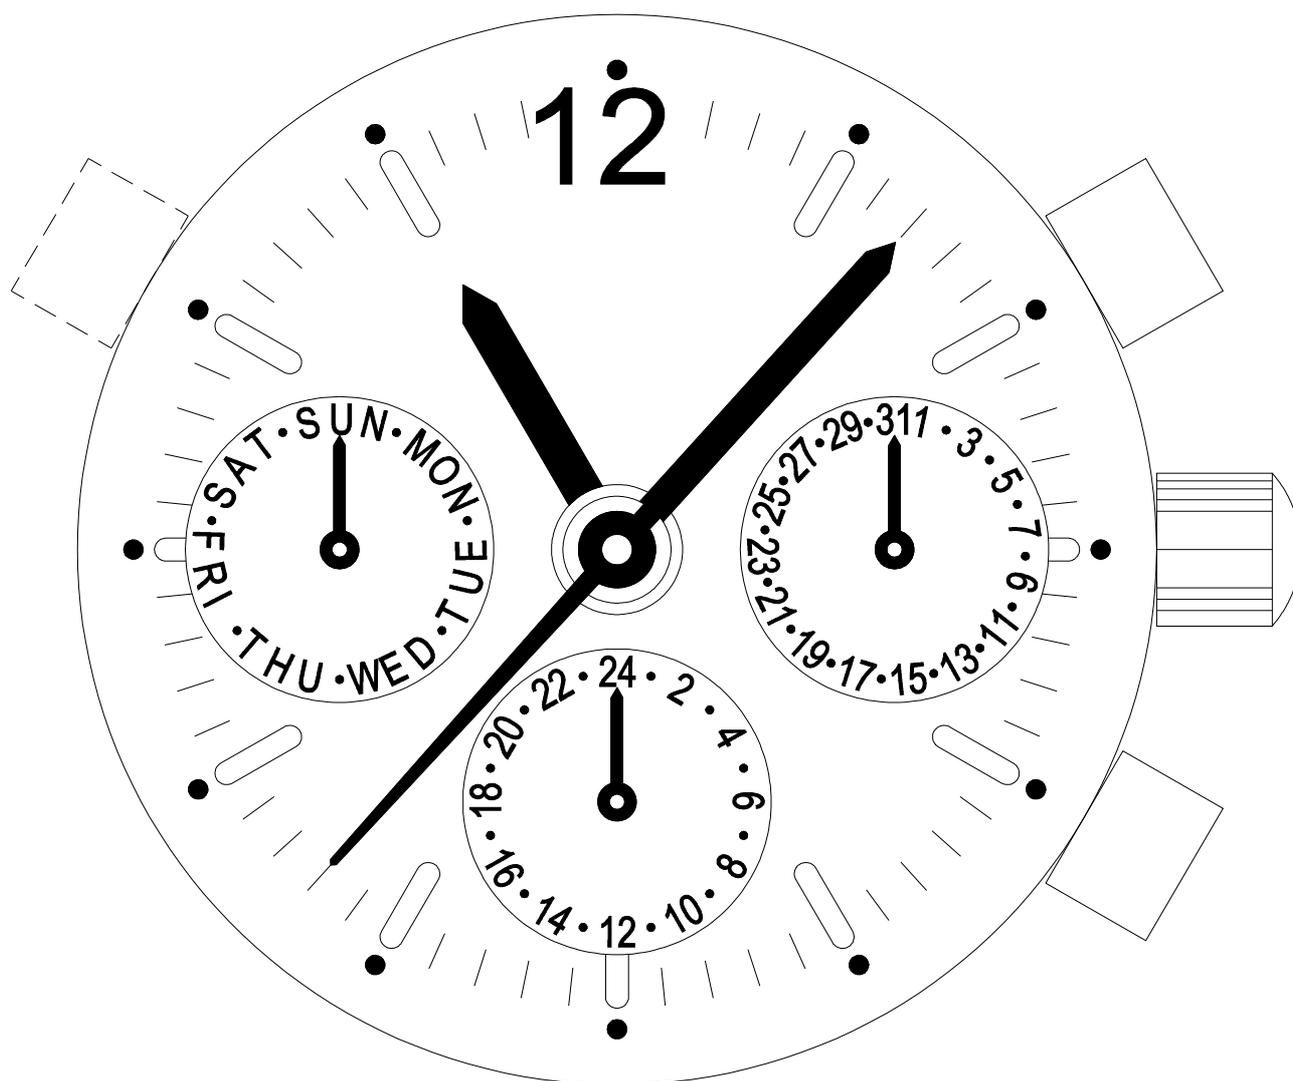

In conformity with RoHS standard

Doc. n° SCTS9238/1970 - E Up date . 22/08/2011 - Page 6